


# MRS System 1500

.032, .040, & .050 aluminum  
22 or 24 ga galvalume  
16 oz. copper

12" - 20" o.c.  
1-1/2" or 1" high  
mechanical seam  
single or double lock

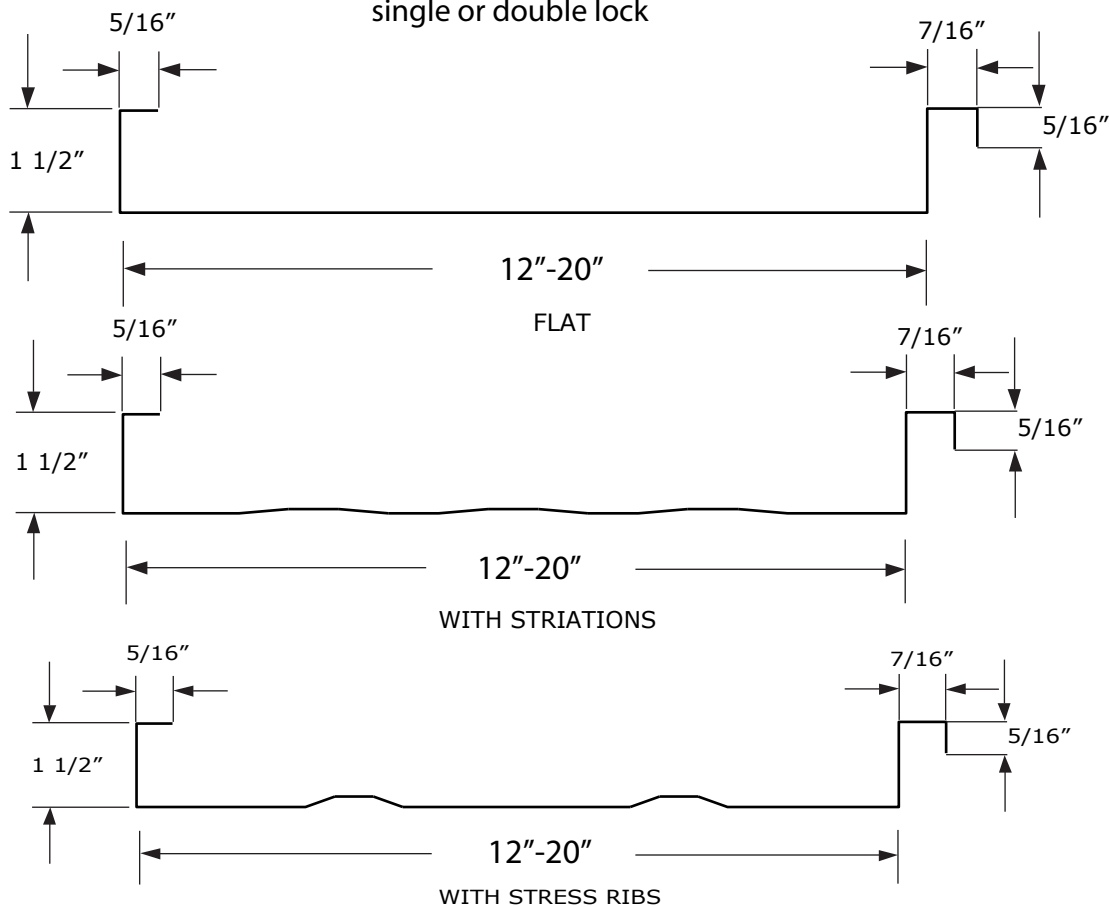

ASTM E1592 Tested

Ideal for low slope conditions in commercial or residential applications

**Material:** .032, .040, & .050 Aluminum  
24 & 22 Ga. Galvalume  
16 & 20 Oz. Copper

**Features:** Striations (Recommended)  
Flat  
Stress Ribs

**Requirements:** Solid Substrate  
Ice & Water Shield or Synthetic Underlayment  
Minimum Roof Pitch: 1/2" on 12"

**Finish:** Hylar 5000 or Kynar 500

## Locations:

7687 Mikron Drive  
Stanley, NC 28164  
Tel: 704-820-3110  
Fax: 704-820-0113

370-C Allied Drive  
Conway, SC 29526  
Tel: 843-347-6673  
Fax: 843-347-6693

3214 Hanover Road  
Johnson City, TN 37604  
Tel: 423-239-0013 Fax:  
423-447-7150



**METAL ROOFING**  
Systems, Inc

Website: [www.metalroofingsystems.biz](http://www.metalroofingsystems.biz)