


MRS System 2500

12", 14", 16", or 18" o.c.
2" high
Mechanical Seam
Single Lock & Double Lock

24 & 22 Ga. Galv.
.032, .040, .050 Alum.
16 & 20 Oz. Copper

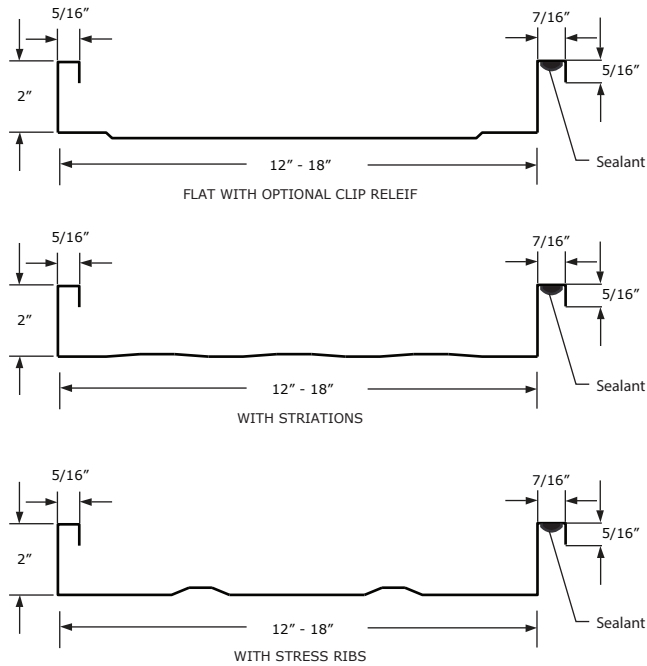

U.L. 580 Class 90 Certified ASTM E1592, E1646, E1680 Tested

Ideal for low slope conditions in commercial or residential applications

- Material:** 24 & 22 GA Galvalume
.032, .040, .050 Aluminum,
16 & 20 Oz. Copper
12", 14", 16", or 18" o.c.
- Features:** Stiffening Ribs, Pencil Ribs, Striated, and Flat Profiles are all Available.
Clip Relief Optional.
- Requirements:** Solid Substrate, Open Framing
Ice & Water Shield or Synthetic Underlayment
Minimum Roof Pitch: 1/2" on 12"
- Finish:** Hylar 5000 or Kynar 500

Locations:

7670 Mikron Drive
Stanley, NC 28164
Tel: 704-820-3110
Fax: 704-820-0113

2451 Bulk Plant Road
Conway, SC 29526
Tel: 843-365-6673
Fax: 843-365-6683

5512 Fort Henry Drive
Kingsport, TN 37663
Tel: 423-239-0013
Fax: 423-447-7150



METAL ROOFING
Systems, Inc

Website: www.metalroofingsystems.biz