


## MRS System 1500

12" - 20" o.c.  
1-1/2" or 1" high  
mechanical seam  
single or double lock

.032 aluminum  
22 or 24 gauge steel  
16 oz. copper

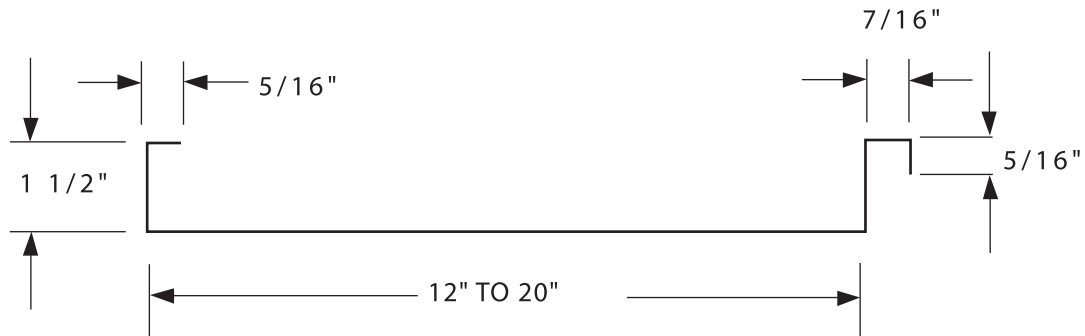

### ASTM E1592 Tested

Ideal for low slope conditions in commercial or residential applications

**Material:** .032 Aluminum, 22 or 24 gauge Steel, 16 oz. Copper  
12" to 20" o.c.

**Features:** Striations (Recommended)  
Flat  
Stress Ribs

**Requirements:** Solid Substrate  
Ice & Water Shield or Synthetic Underlayment  
Minimum Roof Pitch: 1/2" on 12"

**Finish:** Hylar 5000<sup>®</sup> or Kynar 500<sup>®</sup>

#### Locations:

7670 Mikron Drive  
Stanley, NC 28164  
Tel: 704-820-3110  
Fax: 704-820-0113

370-C Allied Drive  
Conway, SC 29528  
Tel: 843-347-6673  
Fax: 843-347-6693

5512 Fort Henry Drive  
Kingsport, TN 37663  
Tel: 423-239-0013  
Fax: 423-447-7150



**METAL ROOFING**  
Systems, Inc

Website: [www.metalroofingsystems.biz](http://www.metalroofingsystems.biz)