


MRS "R" Panel

36" width
1 1/4" Rib height
Max recommend length is 45'

24 or 26 ga Galvalume

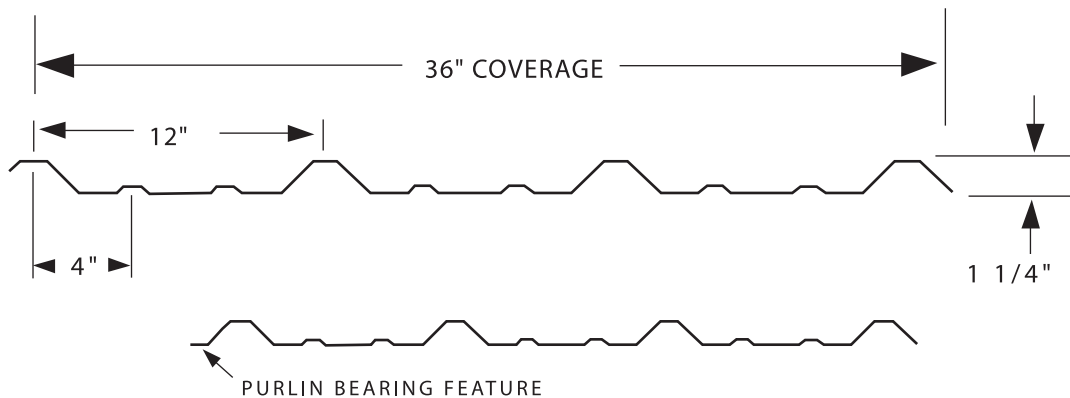

Rugged design for commercial and industrial applications.
Can be used as roof or wall panel.

- Material:** 24 or 26 ga Galvalume.
36" width, 1 1/4" rib height, Maximum recommend length is 45'.
- Features:** Purlin Bearing Feature
Exposed Fasteners
- Requirements:** Open Framing, Solid Substrate
Solid Substrate requires 30# Felt or Ice & Water Shield
High Side Attachment (6 Fasteners per Panel)
Sidelap Attachment (6 Fasteners per Panel, 1/2" X 3/32" Tape Sealant)
Intermediate Purlin Attachment (3 Fasteners per Panel)
Eave Attachment (6 Fasteners per Panel)
Minimum Roof Pitch: 1" on 12"
- Finish:** Kynar 5000[®] or Kynar 500[®]

Locations:

7687 Mikron Drive
Stanley, NC 28164
Tel: 704-820-3110
Fax: 704-820-0113

370-C Allied Drive
Conway, SC 29526
Tel: 843-365-6673
Fax: 843-365-6683

3214 Hanover Road
Johnson City, TN 37604
Tel: 423-239-0013
Fax: 423-447-7150



METAL ROOFING
Systems, Inc

Website: www.metalroofingsystems.biz