


MRS Mega Rib

36" width
1.5" Rib height
Max recommend length is 45'

24 or 26 ga Galvalume

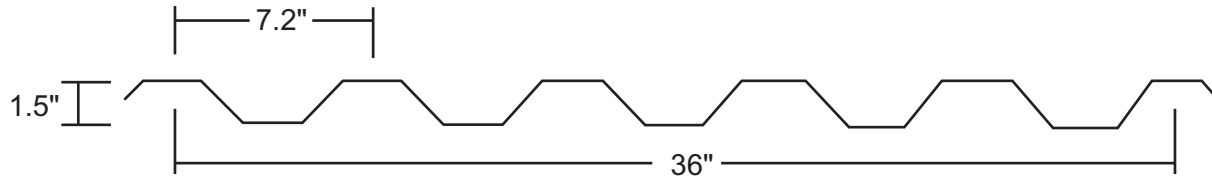

Rugged design for commercial and industrial applications.
Can be used as roof or wall panel.

- Material:** 24 or 26 ga Galvalume.
36" width, 1.5" rib height, Maximum recommend length is 45'.
- Features:** Purlin Bearing Feature
Exposed Fasteners
- Requirements:** Open Framing, Solid Substrate
Solid Substrate requires 30# Felt or Ice & Water Shield
High Side Attachment (6 Fasteners per Panel)
Sidelap Attachment (6 Fasteners per Panel, 1/2" X 3/32" Tape Sealant)
Intermediate Purlin Attachment (3 Fasteners per Panel)
Eave Attachment (6 Fasteners per Panel)
Minimum Roof Pitch: 1" on 12"
- Finish:** Hylar 5000[®] or Kynar 500[®]

Locations:

7687 Mikron Drive
Stanley, NC 28164
Tel: 704-820-3110
Fax: 704-820-0113

370-C Allied Drive
Conway, SC 29526
Tel: 843-365-6673
Fax: 843-365-6683

3214 Hanover Road
Johnson City, TN 37604
Tel: 423-239-0013
Fax: 423-447-7150



METAL ROOFING
Systems, Inc

Website: www.metalroofingsystems.biz