
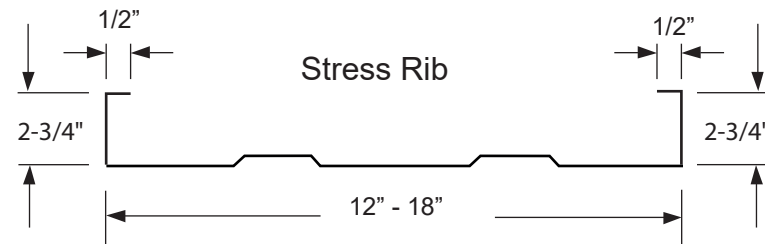
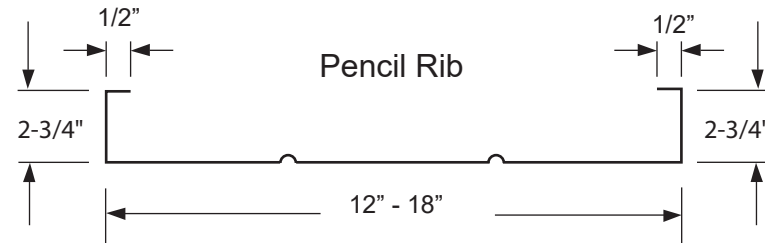
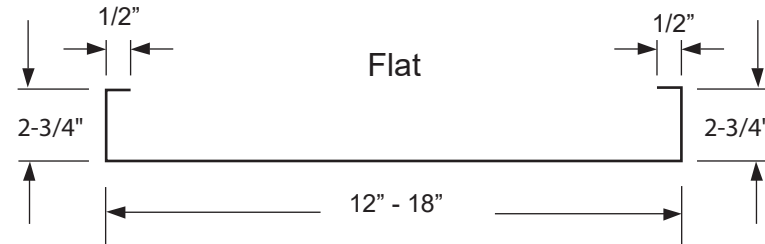


**MRS System 3000**

12"-18" O.C.  
Mechanically Seam  
3" High Nominal

24 & 22 Ga. Galv.  
.032, .040, & .050 Alum.  
16 & 20 Oz. Copper

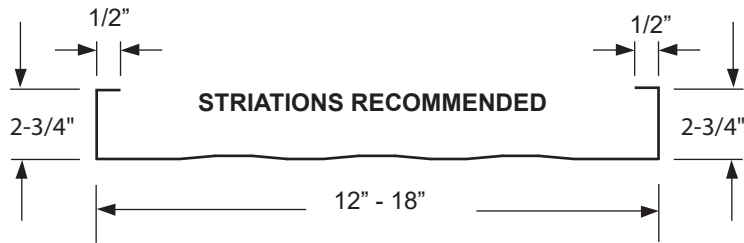

**U.L. 580 Class 90**

**ASTM E1592, E1646, E1680**



Ideal for low slope conditions in commercial or residential

**Material:** 24 & 22 Ga. Galv.  
.032, .040, & .050 Alum.  
16 & 20 Oz. Copper

**Features:** Flat  
Striations  
Curved  
Optional Sealant in Batten

**Requirements:** Solid substrate, Open Framing  
30# Felt or Ice & Water Shield  
Minimum Roof Pitch: 1/2" on 12"

**Finish:** Hylar 5000<sup>®</sup> or Kynar 500<sup>®</sup>



\* Clip is 4-3/8" wide and 3" tall.

\* Panel is held 1/4" off deck by clip.

**Locations:**

7687 Mikron Drive  
Stanley, NC 28164  
Tel: 704-820-3110  
Fax: 704-820-0113

370-C Allied Drive  
Conway, SC 29526  
Tel: 843-365-6673  
Fax: 843-365-6683

3214 Hanover Road  
Johnson City, TN 37604  
Tel: 423-239-0013  
Fax: 423-447-7150



**METAL ROOFING**  
Systems, Inc

Website: [www.metalroofingsystems.biz](http://www.metalroofingsystems.biz)